


# Water

C.Y. Tan  
14 Sep 2011



4 outputs and returns  
in test room.

# Flow Switches

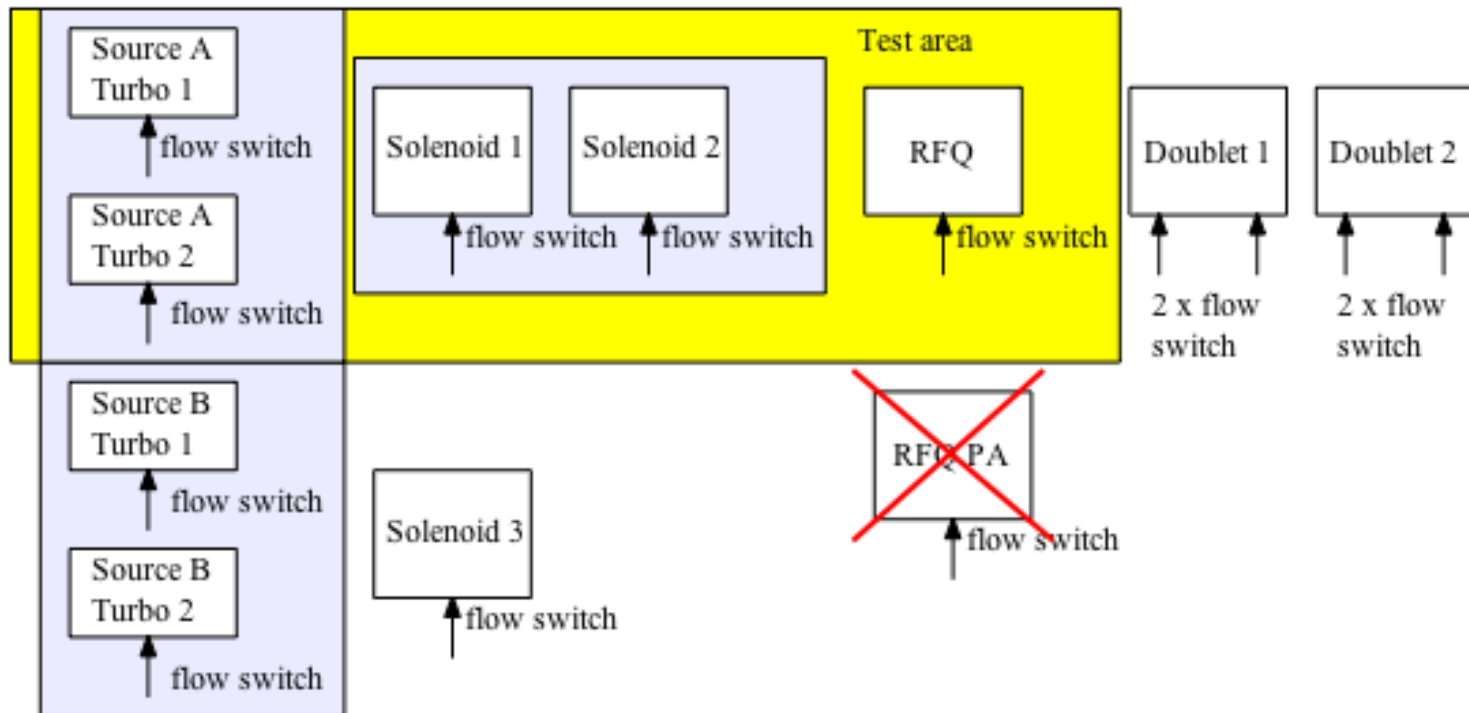

Flow switches and manifold being worked on.  
Manifold for RFQ and doublets and solenoids.

Monitored by not interlocked.

# Pressure and Flow Rate Requirements

- Skid has 4 outputs @125 psi (=0.86 Mpa), 1/2 inch pipes, 55 deg water.
  - Solenoids. Flow rate 2.5 l/min.
  - RFQ. No numbers. 2.5 l/min?
  - Doublets (not used in test area) 3 l/min.
- LCW with rubber hoses.
  - Source turbos. 2 l/min, < 0.3 Mpa = 43.5 psi.